


ENVO-TITE™

INDICATIVE SEAL DESIGNED FOR USE ON FIRE EXTINGUISHERS

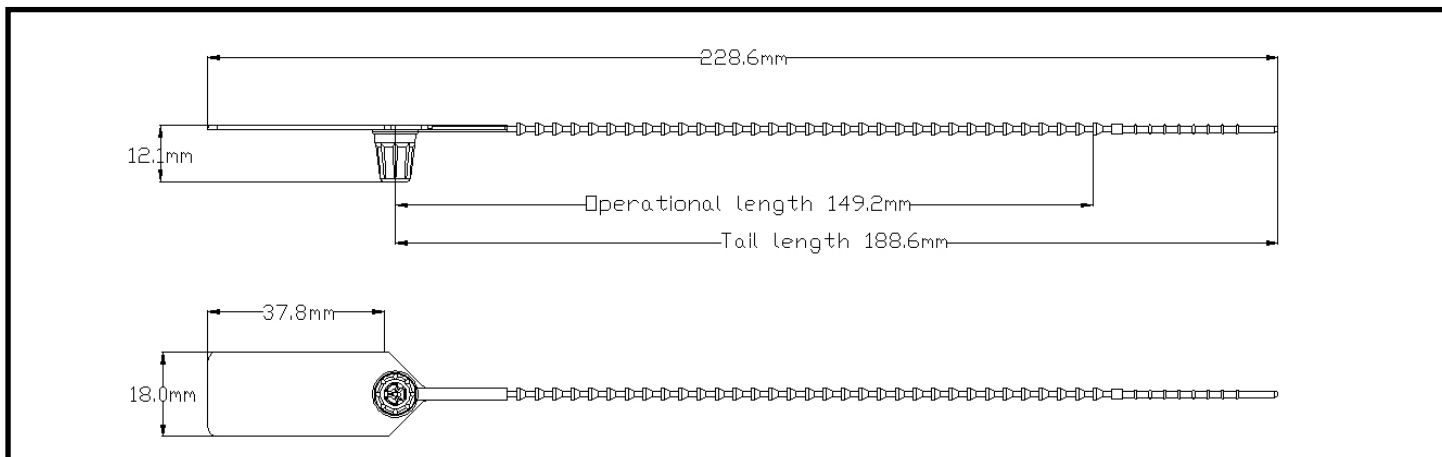

FEATURES

- Designed specifically for fire extinguishers
- Simple one piece polypropylene construction
- High quality laser print allows for detailed logos or barcoding
- Plain version available in bright colours
- Designed as an indicative seal and not intended as a security seal

SPECIFICATION

Materials:

Envo-tite: Polypropylene

Pull Strength (average):

Envo-tite: approx. 52N (equivalent to ~5kg)

Recommended Operational Temperature Range*:

Envo-tite: 0°C to +50°C

(NB: all material is increasingly brittle with decreasing temp.)

Certification:

UL certification: Pending

C-TPAT / ISO/PAS 17712: Indicative Seal equivalent

Minimum hole size for tail to pass through:

Envo-tite: ~2.8mm diameter

Stock Versions:

Printed: Pale colour, Polypropylene

Plain: Standard colour, Polypropylene

Stock Colours:

Printed: Pale blue, pale green, pale yellow

Plain: Standard blue, standard green, standard yellow, standard red

Stock Markings:


Printed: Laser printed ENVOSEAL and 7 digit number

Plain: none


Packaging:

All versions: 1000 per box (in mats of 10), 260x210x300mm, 1.5kg


1. Tear seal from mat.



2. Loop seal through aperture on extinguisher and feed into chamber from the side labelled ENTER.

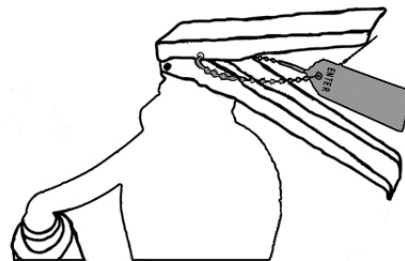

3. Pull tail through to form a suitably tight loop.

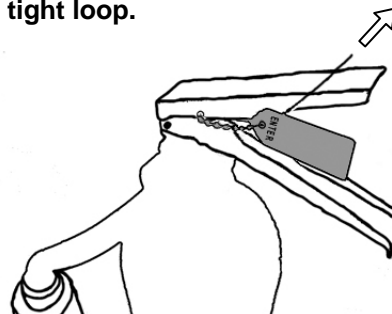



CUSTOMISATION

All customisation available upon request only for orders above:

All custom versions: 25,000 parts

Custom Versions:

Same as stock versions

Custom Marking:

Front: Laser marked logos, numbers and barcodes

Custom Colours:

All custom versions: choice of colours – colours are pale for printed product

APPLICATIONS

- Fire extinguishers

TYPICAL RAW MATERIAL SAFETY AND PROPERTIES

	Polypropylene
Health & Safety	The material is not hazardous. However, care should be taken when applying and removing a seal.
Storage & handling	Keep in secure, dry & well ventilated place at room temperature and protect from contamination.
Disposal of used seals	This product is not bio-degradable. It should be recycled or otherwise disposed of in compliance with local authority regulations.
Flammability	UL 94: HB
In case of fire	Fires can be extinguished by conventional means with water spray preferred.
Melting point	Polypropylene will melt at approx. 150 degrees centigrade.

All values are typical values as published and are for guidance only. ITW Envopak reserves the right to alter these specifications without notice. The above safety information has been extracted from material safety data sheets supplied by our raw material suppliers. No liability is taken by ITW Envopak for the accuracy of this information.

*Recommended operational temperature range is a guide only. The seal can withstand more extreme temperatures depending on conditions. For temperatures outside the recommended range seals should first be tested in the specific application by the customer.