


POSILOK[®]

A FIXED LENGTH PLASTIC SEAL WITH POSITIVE VISUAL INDICATION OF LOCKING.

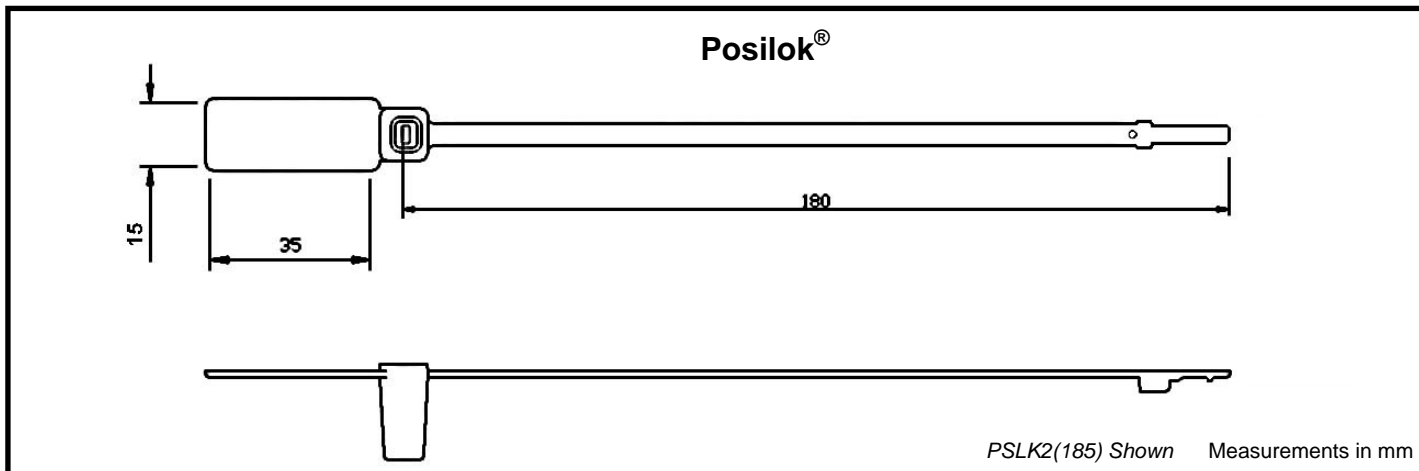

FEATURES

- Positive visual indication that the seal has been locked
- Tamper evident free movement in chamber when sealed
- 2 different fixed length options available
- Simple one click application
- Tear line for removal by hand

SPECIFICATION

Materials:

All versions: Polypropylene (PP)

Pull Strength (average):

All versions: approx. 63N (equivalent to ~6kg)

Recommended Operational Temperature Range*:

All versions: 0°C to +50°C

(NB: all material is increasingly brittle with decreasing temp.)

Customs classification:

ISO/PAS 17712: Indicative Seal

UK Customs: Group 3 equivalent

Minimum hole size for tail to pass through:

All versions: 5mm x 6.5mm

Stock Versions:

PSLK2: Posilok[®] PP, 185mm, with tear line

PSLK3: Posilok[®] PP, 250mm, with tear line

Stock Colours:

PSLK2: Blue or green

PSLK3: Blue or yellow

Stock Markings:


All versions: Hot foil printed (white or black)

Envoseal logo & 7 digit number

Packaging:

PSLK2: 1000 per box, mats of 10, 470x330x230mm, 3.4kg

PSLK3: 1000 per box, mats of 10, 570x330x230mm, 3.7kg

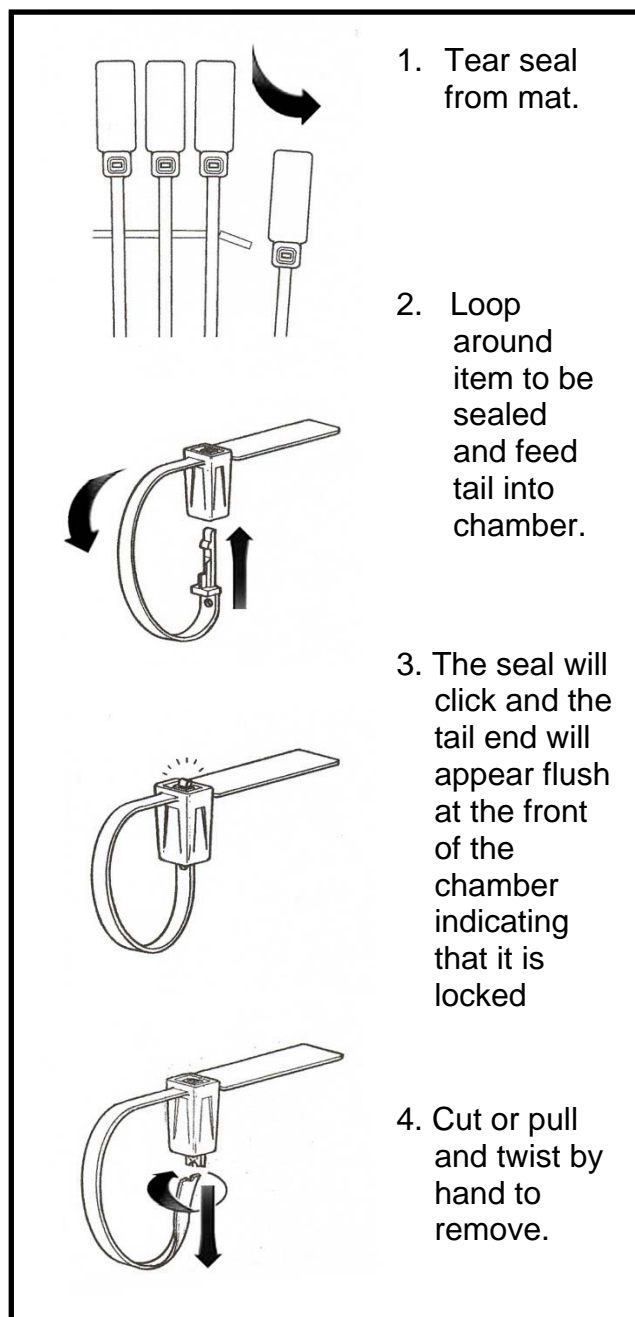



CUSTOMISATION

All customisation available upon request only for orders above:

All versions: 25,000

Custom Versions:

Same as Stock versions

Custom Marking:

All versions: Hot foil printed 26x7mm Print Area (white or black) 7 digit numbering and custom logo
OR

Laser marked (dark grey) barcode and numbers and possibly custom logo (max. 30x9mm)

Custom Colours:

All versions: Choice of colours (Note: for laser markings the colours must be light/pale)

APPLICATIONS

- Roll cages
- Vehicle doors
- Cases/Boxes
- Aircraft boxes
- Fire exit doors

TYPICAL RAW MATERIAL SAFETY AND PROPERTIES

	Polypropylene
Health & Safety	The material is not hazardous. However, care should be taken when applying and removing a seal.
Storage & handling	Keep in secure, dry & well ventilated place at room temperature and protect from contamination.
Disposal of used seals	This product is not bio-degradable. It should be recycled or otherwise disposed of in compliance with local authority regulations.
Flammability	UL 94: HB
In case of fire	Fires can be extinguished by conventional means with water spray preferred.
Melting point	Polypropylene will melt at approx. 150 degrees centigrade.

All values are typical values as published and are for guidance only. ITW Envopak reserves the right to alter these specifications without notice. The above safety information has been extracted from material safety data sheets supplied by our raw material suppliers. No liability is taken by ITW Envopak for the accuracy of this information.

*Recommended operational temperature range is a guide only. The seal can withstand more extreme temperatures depending on conditions. For temperatures outside the recommended range seals should first be tested in the specific application by the customer.