


# POST GRIP™

DESIGNED SPECIFICALLY FOR THE ROYAL MAIL FOR MAILSACKS

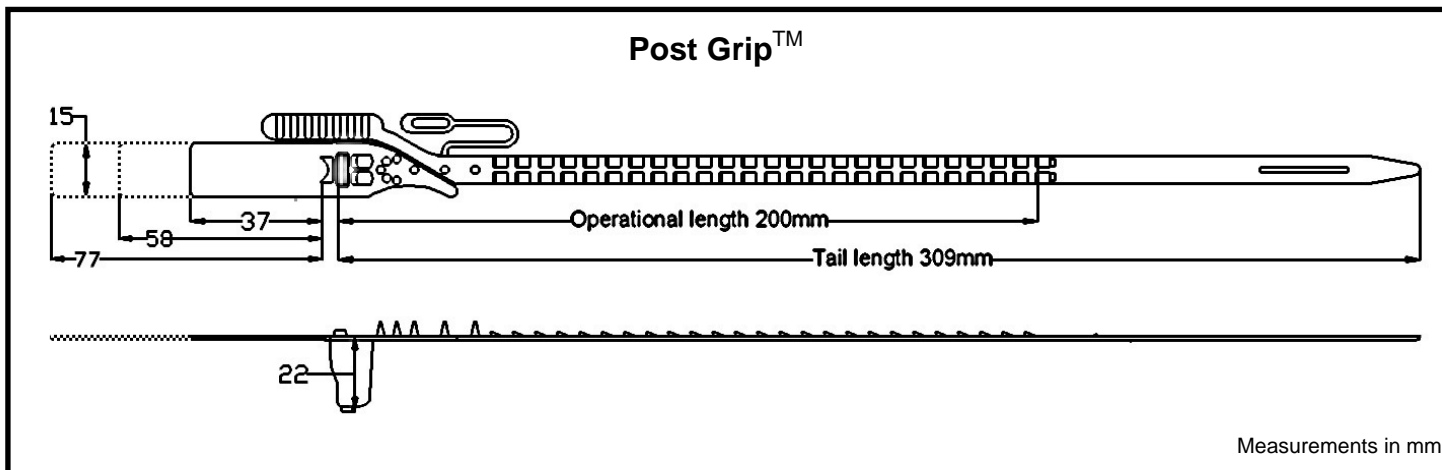

## FEATURES

- Simple pull up design allows for speedy application
- Available with tear line for easy removal by hand
- Available with label holder and grip spikes
- Contains no metal parts – is recyclable
- Tensioning tool available to assist application and removal of surplus tail

## SPECIFICATION

### Materials:

Post Grip™: Polypropylene

### Pull Strength (average):

Tensile strength: approx. 300N (equivalent to ~30kg)

### Recommended Operational Temperature Range\*:

Post Grip™: 0°C to +50°C

(NB: all material is increasingly brittle with decreasing temp.)

### Customs classification:

ISO/PAS 17712: Indicative seal

UK Customs: Group 3 equivalent

### Minimum hole size for tail to pass through:

8mm diameter hole or 8mm x 2.5mm slot

### Stock Versions:

POGRPT1: Short flag, with tear line, with label holder & grip spikes, 200mm operational length, mats of 10

### Stock Colours:


All stock versions: Blue, Red, Yellow.

### Stock Markings:

All stock versions: Hot foil stamped (black) "Envoseal logo" & laser marked (black) 7 digit numbering

### Packaging:

1000 per box, mats of 10, 540x380x300mm, 4.0kg

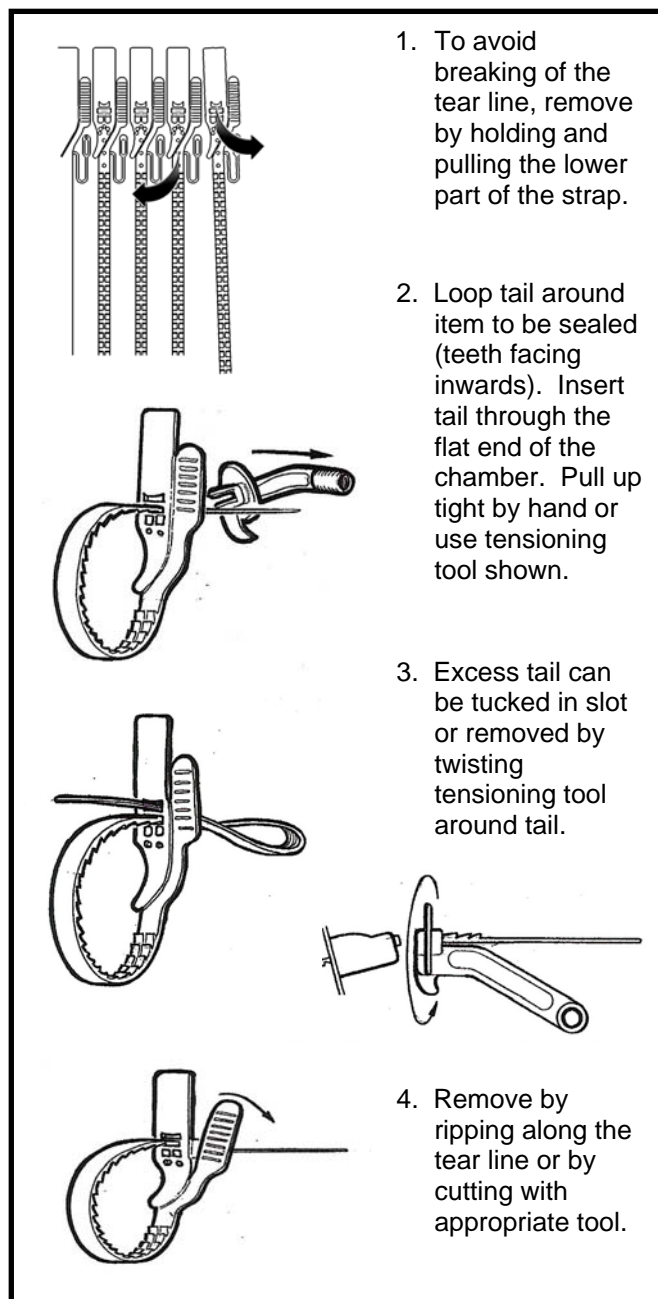



## CUSTOMISATION

All customisation available upon request only for orders above:

All custom versions: 25,000

### Custom Versions:

POGRPT2: Mats of 10, numbered, WTL only, no labelholder, no spikes

POGRPT5: Mats of 10, numbered, labelholder, spikes, NTL

POGRPT1BC: Mats of 10, barcoded, WTL only, labelholder and spikes

POGRPT2BC: Mats of 10, barcoded, WTL only, no labelholder, no spikes

POGRPT3BC: Mats of 10, barcoded, labelholder, spikes, NTL

### Custom Marking:

All custom versions: Hot foil stamped (black or white) custom logo OR white patch (max. 24x7mm)  
OR laser marked (black) custom logo  
and Laser marked 7 digit alpha numeric numbering or barcode (max. 60x12)

### Custom Colours:

All custom versions: choice of colours

## APPLICATIONS

- Mail sacks
- Property bags
- Roll cages
- Boxes

## TYPICAL RAW MATERIAL SAFETY AND PROPERTIES

	<b>Polypropylene</b>
<b>Health &amp; Safety</b>	The material is not hazardous. However, care should be taken when applying and removing a seal.
<b>Storage &amp; handling</b>	Keep in secure, dry & well ventilated place at room temperature and protect from contamination.
<b>Disposal of used seals</b>	This product is not bio-degradable. It should be recycled or otherwise disposed of in compliance with local authority regulations.
<b>Flammability</b>	UL 94: HB
<b>In case of fire</b>	Fires can be extinguished by conventional means with water spray preferred.
<b>Melting point</b>	Polypropylene will melt at approx. 150 degrees centigrade.

All values are typical values as published and are for guidance only. ITW Envopak reserves the right to alter these specifications without notice. The above safety information has been extracted from material safety data sheets supplied by our raw material suppliers. No liability is taken by ITW Envopak for the accuracy of this information.

\*Recommended operational temperature range is a guide only. The seal can withstand more extreme temperatures depending on conditions. For temperatures outside the recommended range seals should first be tested in the specific application by the customer.